

CLS100 Leak Sensor

The leak sensor is specifically designed to monitor the leakage of oil and water in the interlayer of double-wall tanks and double-wall pipelines.



➤ **Safety:**

Tested and approved by CQST, and the explosion-proof grade is ExiaIIAT4, can be used in zone 0 and Zone 1.

➤ **Sensitive:**


Detection precision < 3mm, response time < 2S

➤ **Reliable:**

Using float type principle, can adapt to complex scene environment, have strong anti-interference ability.

➤ **Convenient installation:**

The leak signal will be transmitted directly to the leak alarm controller by 2 core cable.

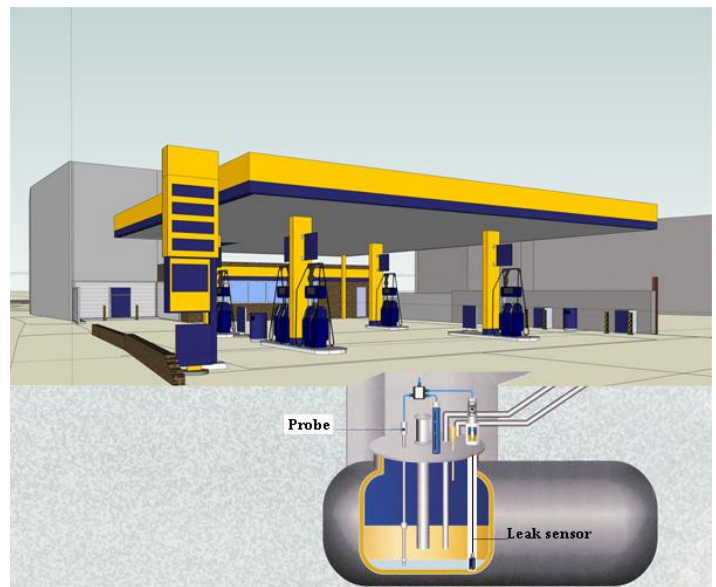

Technical parameters

- Detection accuracy: < 3mm
- Response time: < 2S
- Output signal: switching value
- Working temperature: -40°C ~ +60°C
- Explosion-proof grade: Exia IIAT4

Contact us

ZHENGZHOU WINDBELL MEASUREMENT AND CONTROL TECHNOLOGY CO., LTD.

Add: No.9, Changchun Rd, High-tech Development Zone, Zhengzhou, China 450001

Tel: +86-371-60301609

Fax: +86-371-60301612

E-mail: sales@windbelltek.com

Web: www.windbellgauge.com

Cell & WhatsApp: 0086 137 8350 0071

0086 158 3716 0322